

T-BRICK DRAWING


티브릭 드로잉

Manufacturing and Specifications Information
Quality control for T-Brick (Terra cotta Panel)
기본상세도 2018



표준도면 / Standard drawing

EUTO PLUS

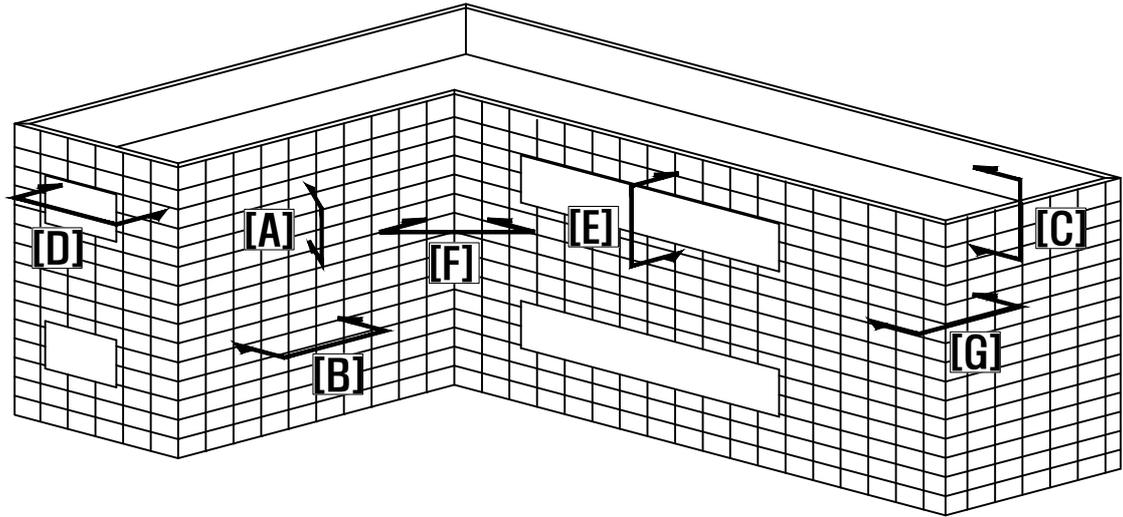


T-BRICK 기본사양

크기 : T20 x H100 x W395
 기본칼라 : 6COLOR 이형색 생산가능
 후레싱재질 : THK2 AL SHEET 또는
 THK0.5 칼라강판 THK0.7 알루미늄 선택가능


T-BRICK Basic Specification

size : T20 x H100 x W395
 Basic Color : 6COLOR Other colors available
 Flashing material : THK2 AL SHEET or
 THK0.5 Color steel plate THK0.7 AL Selectable


main	Index (Isometric)
	T-Brick

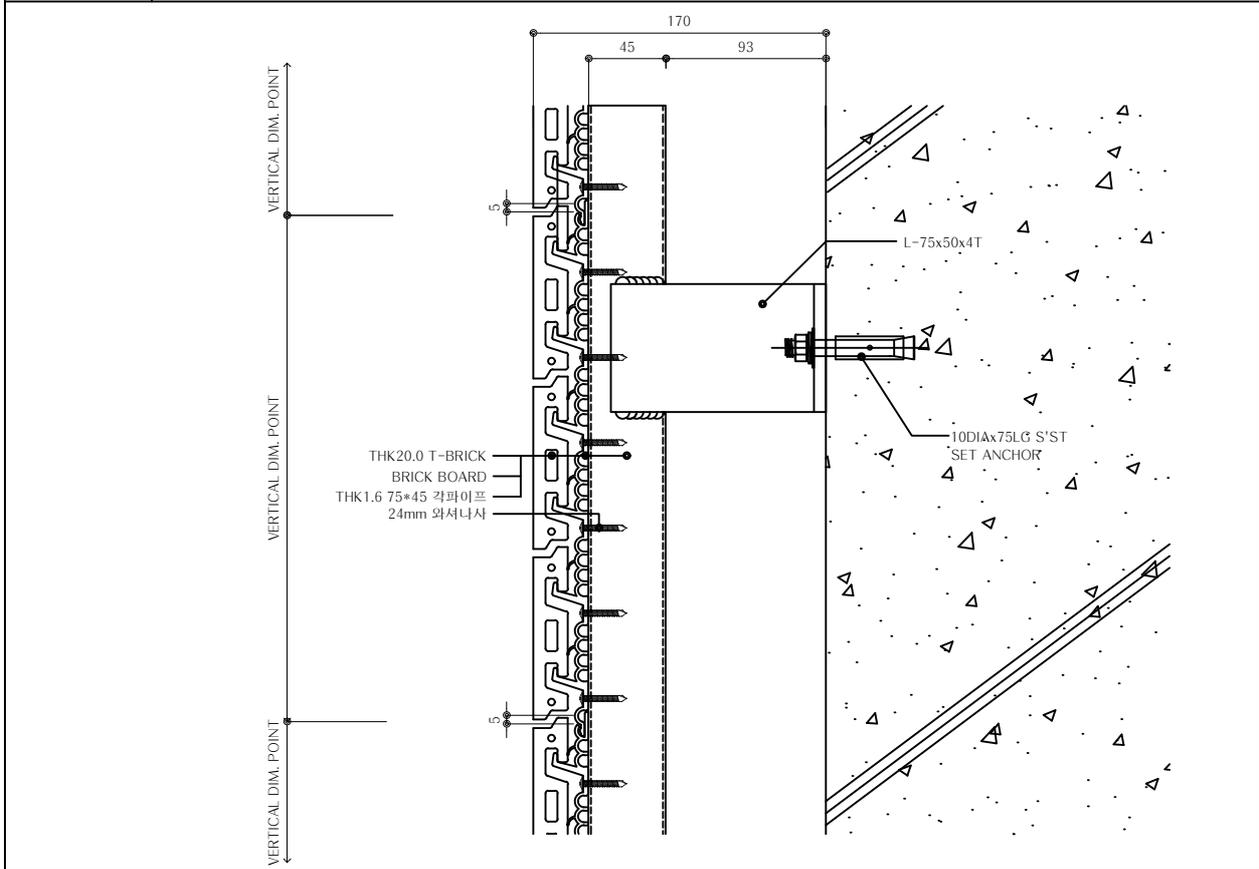


A	기본 단면상세도
	T-Brick

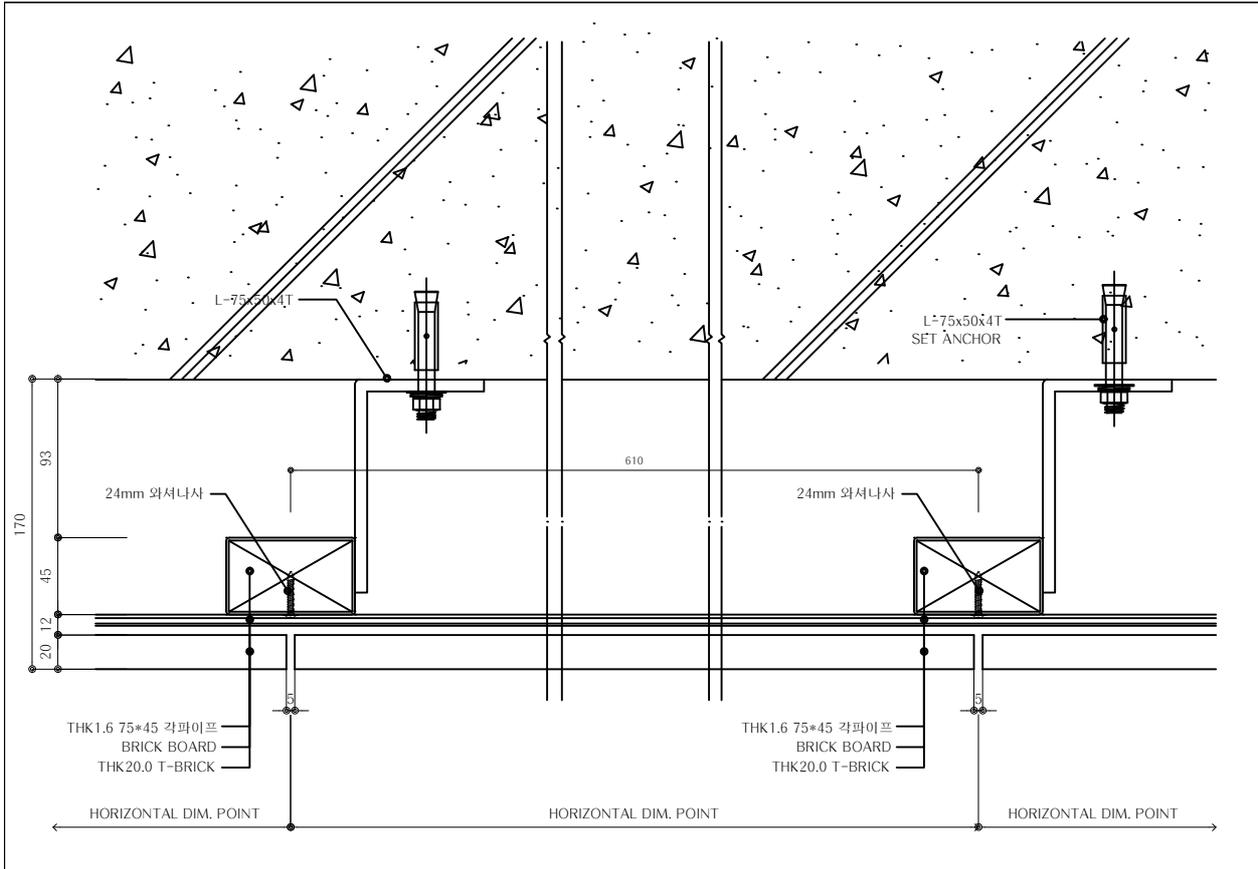


B	기본 평단면상세도
	T-Brick

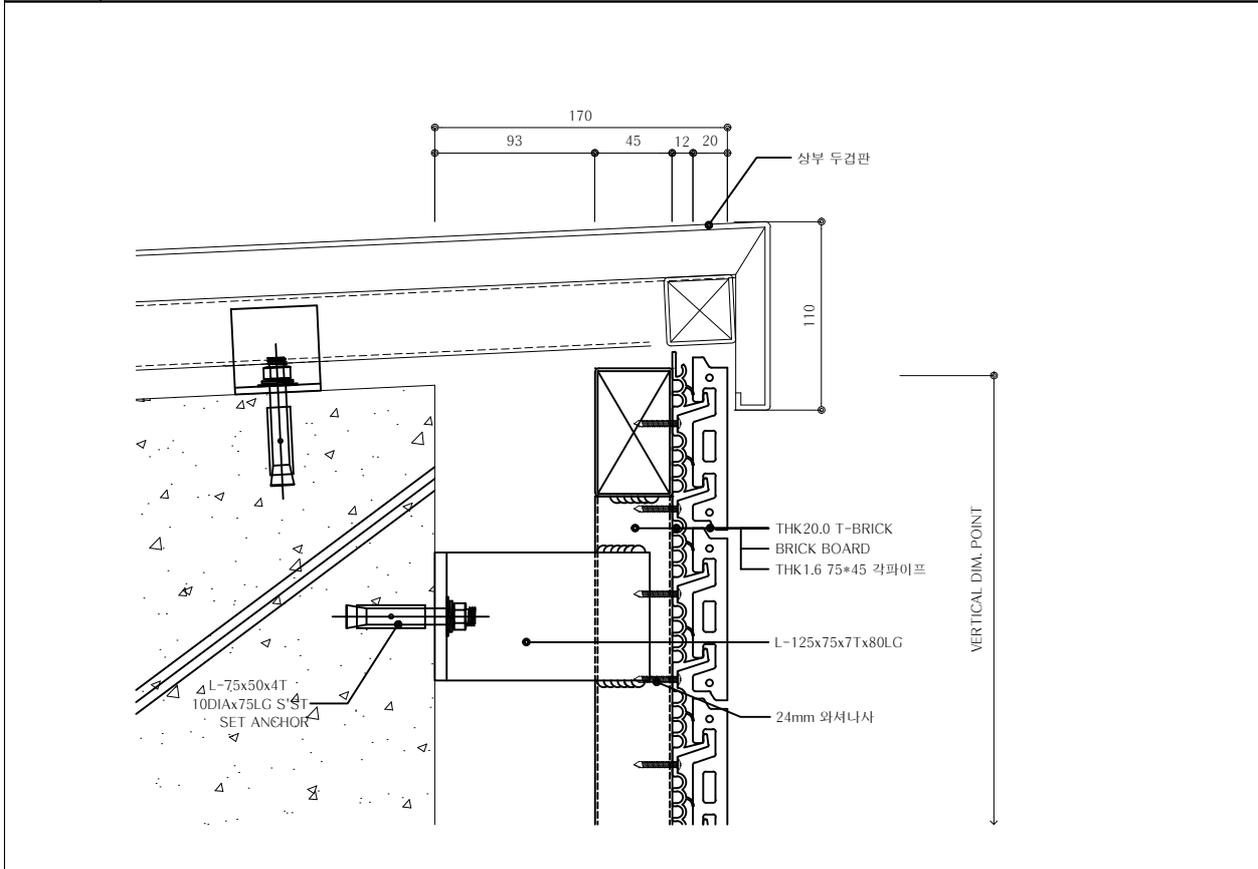


C	두껍 기본 단면 상세도
	T-Brick

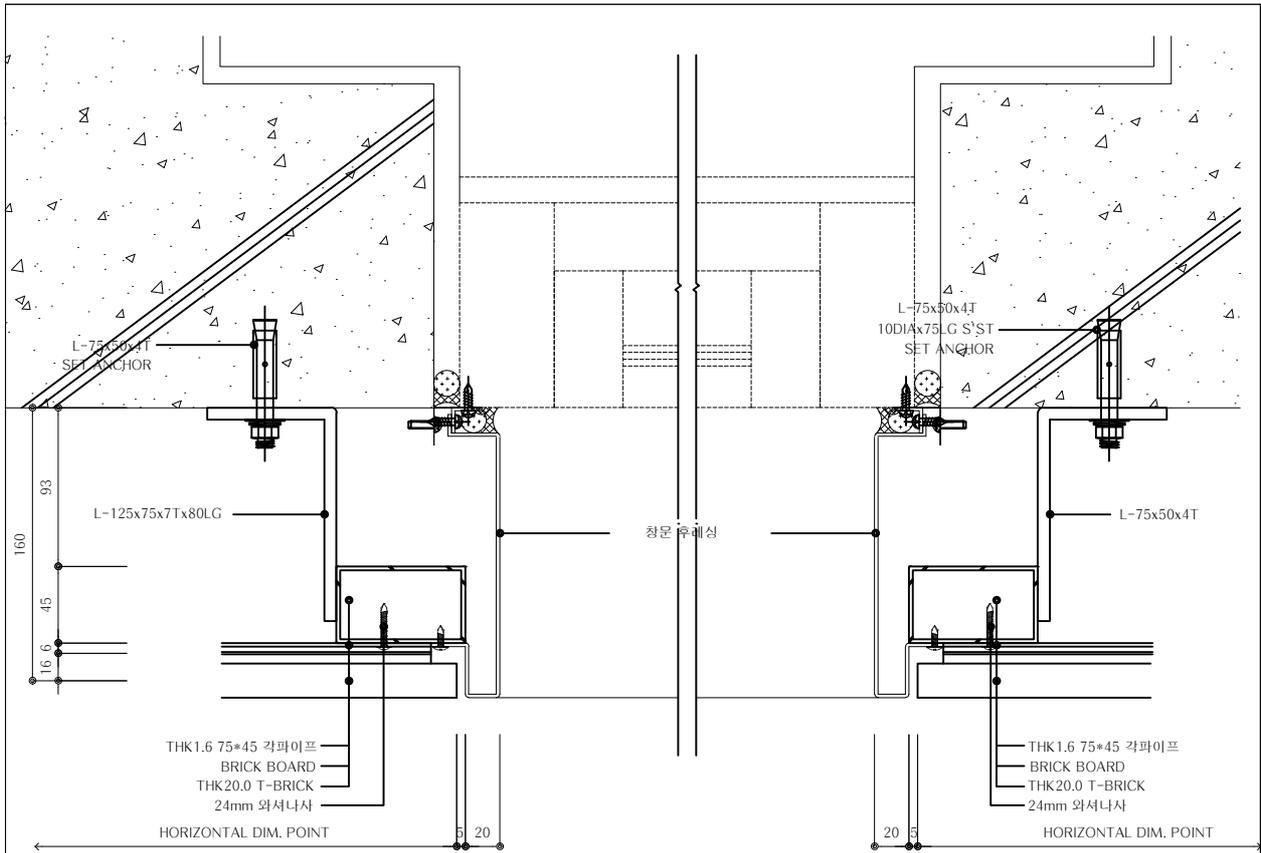


D 창호 기본 평단면 상세도
T-Brick

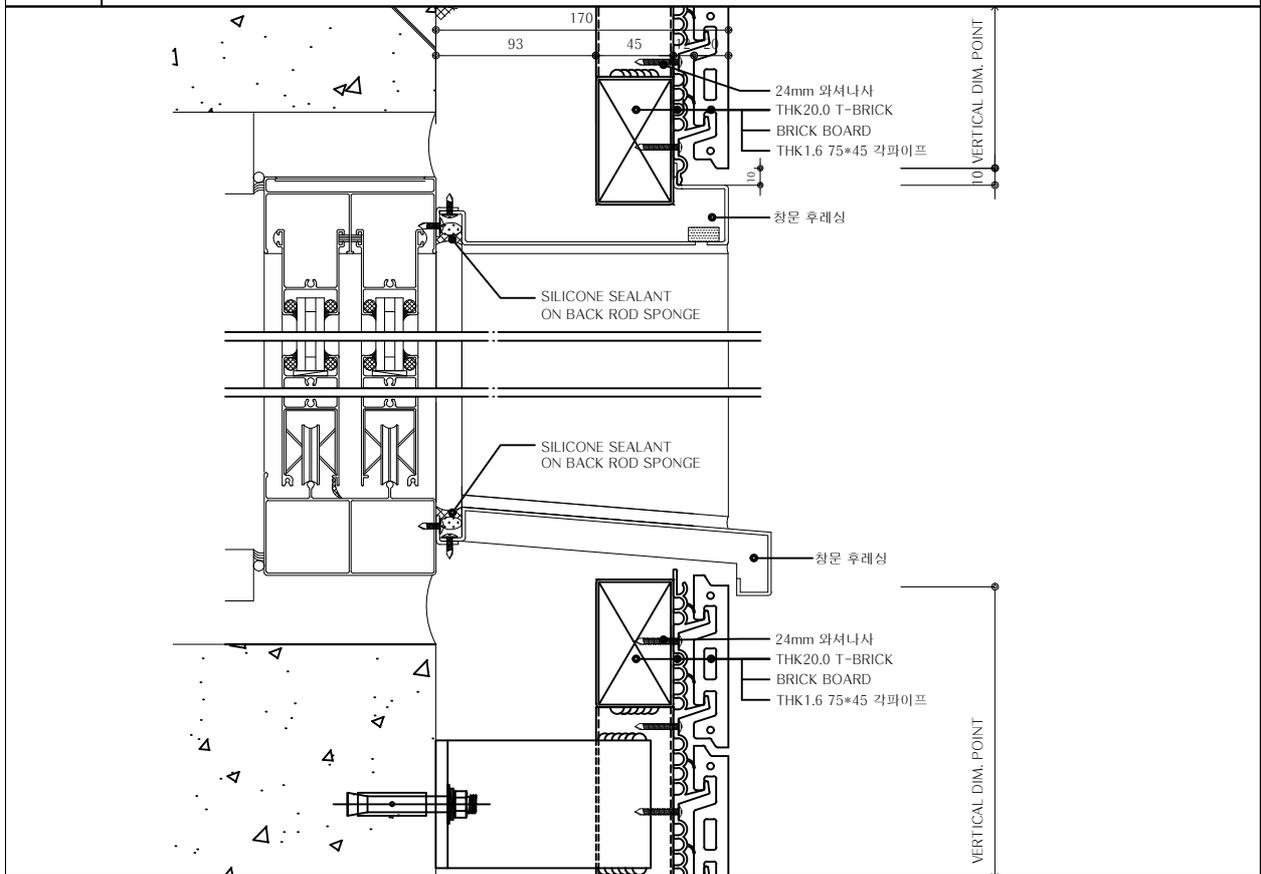

E [E] 창호 기본 단면 상세도
T-Brick

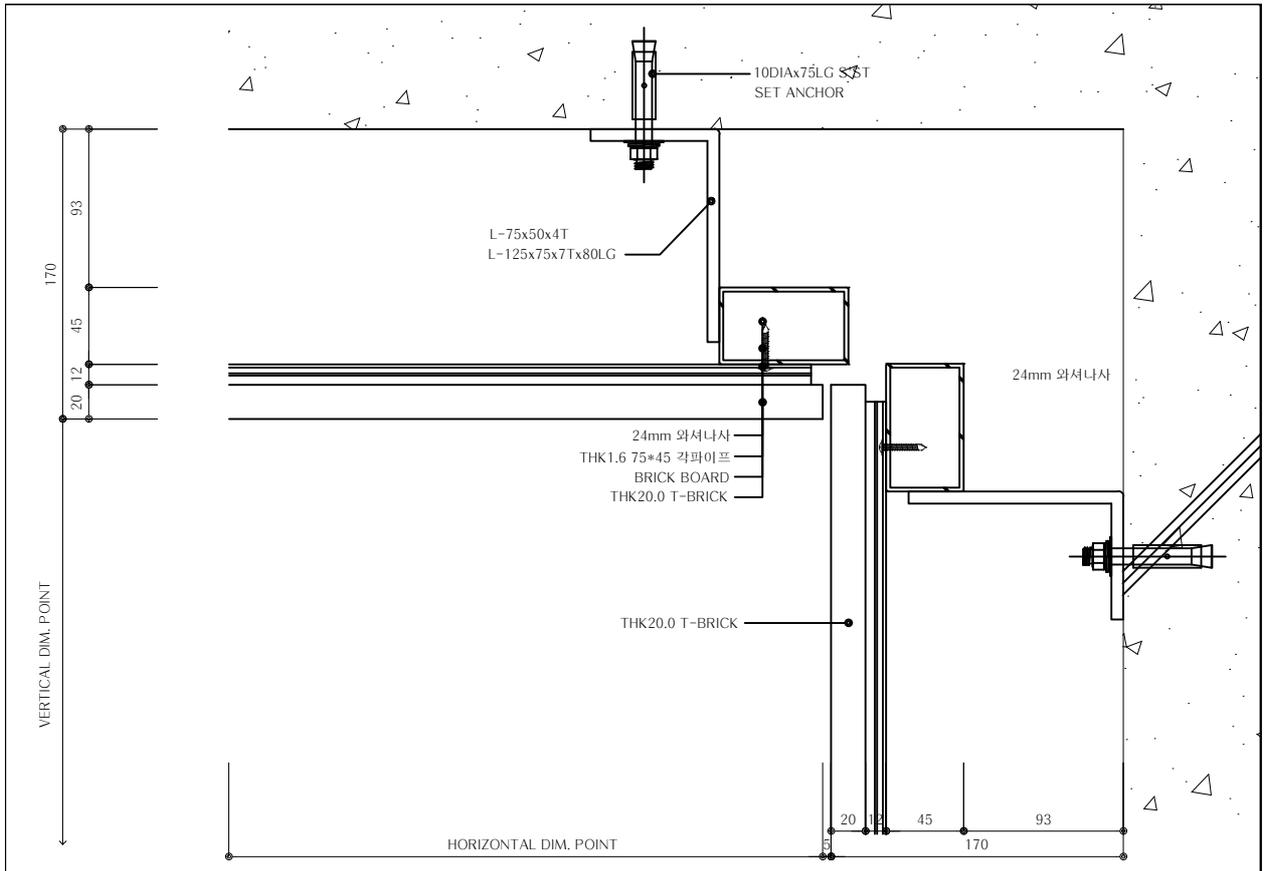



F	[F] 안쪽 코너 기본 단면 상세도
	T-Brick

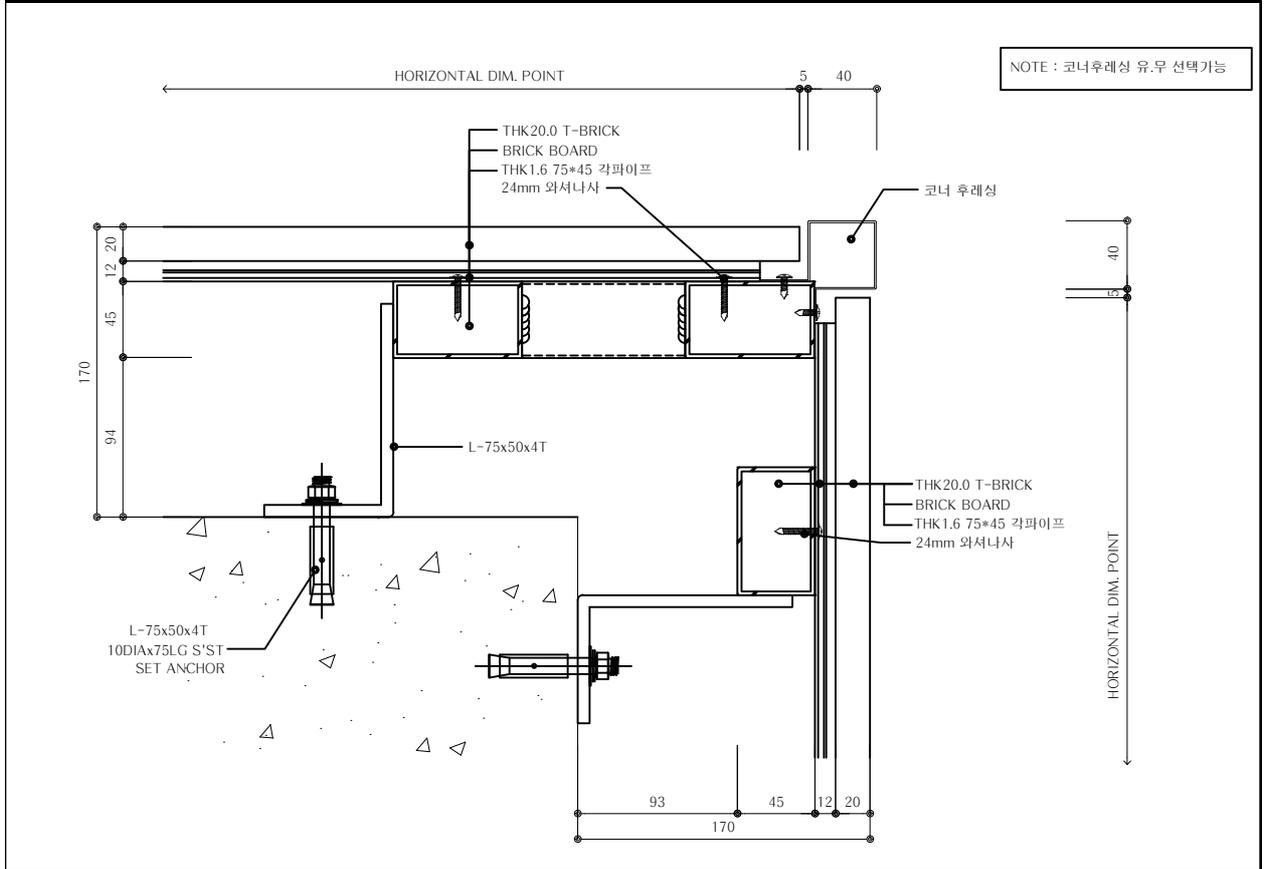

G	[G] 바깥 코너 기본 단면 상세도
	T-Brick


<p>외부코너 후레싱</p>	<p>외부코너 후레싱</p>
<p>인코너 후레싱</p>	<p>I형 AL 후레싱</p>
<p>측면마감 AL 후레싱</p>	<p>상부 후레싱</p>
<p>양날 후레싱</p>	

기준 먹 Standard Mark

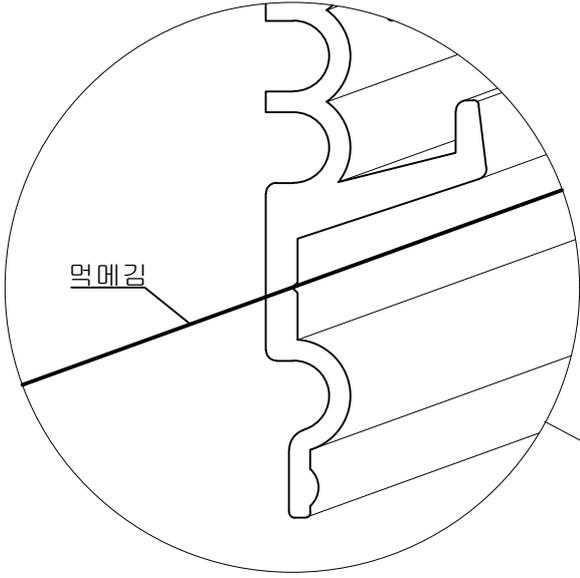

300mm 간격으로 먹메김

오버랩

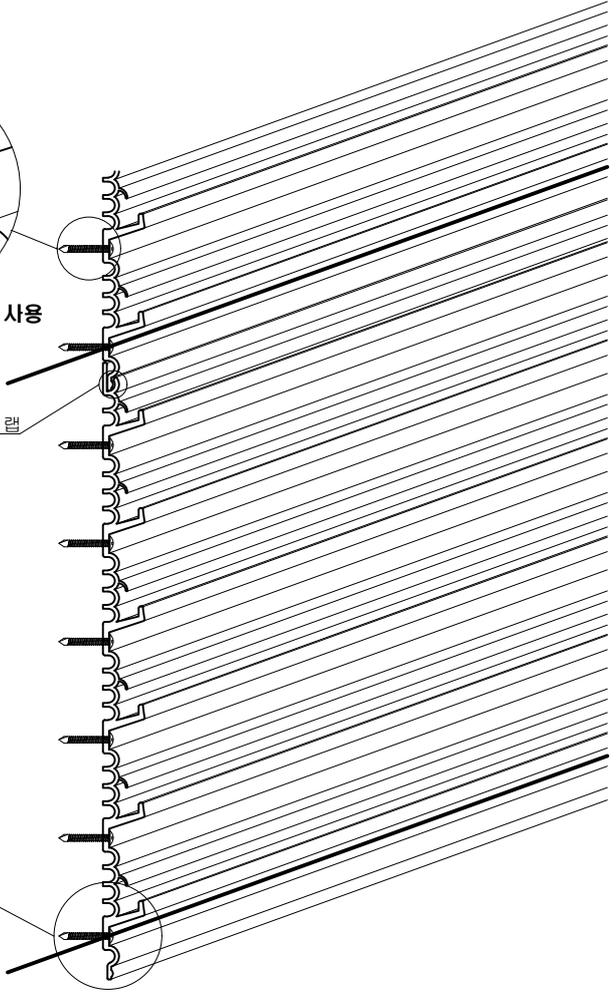

300mm 간격으로 먹메김

300mm 간격으로 먹메김

50

50

50

50

50

50

50



2,400 (3,000)

600


600


600

600

Joint Seal

Brick Board 계단식 시공

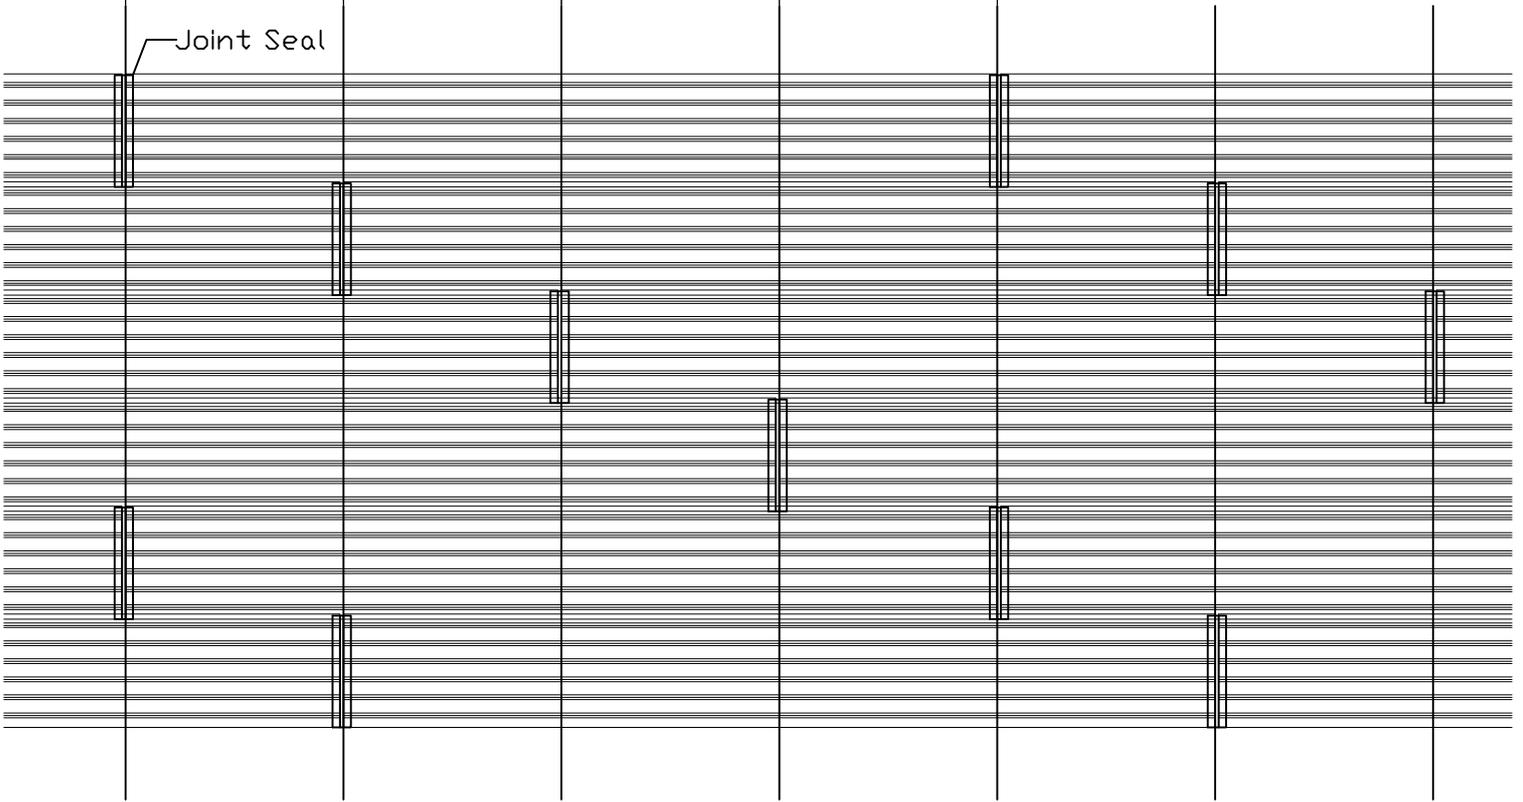

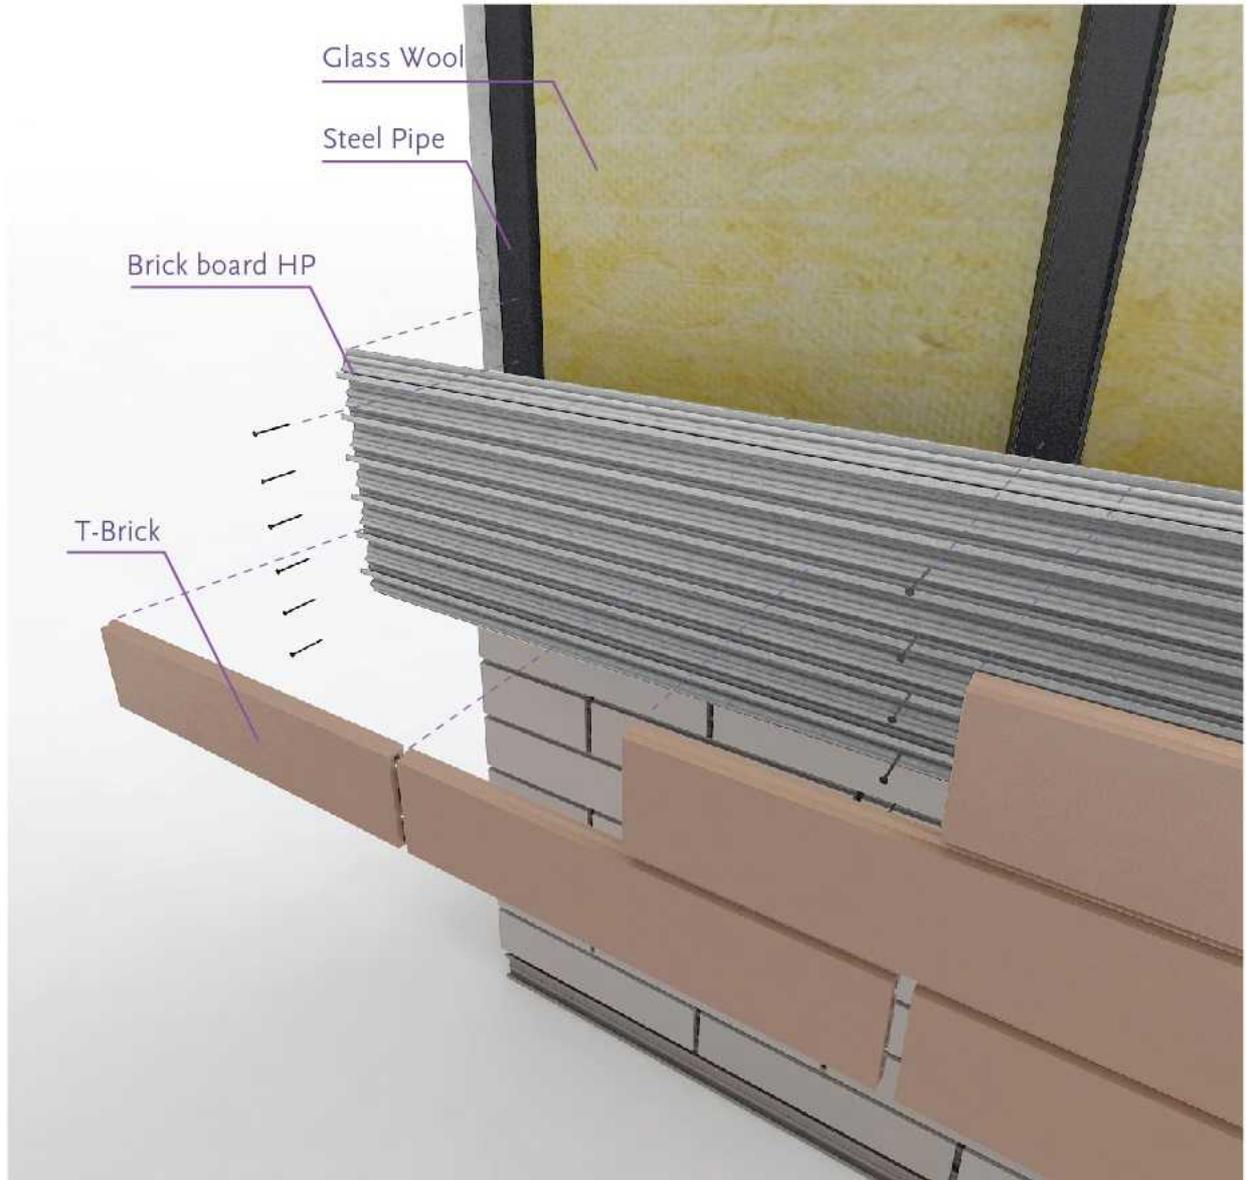

INSTALLATION Process



T-Brick Board 티브릭 보드

Fire retardant material
난연기능 (PVC board)
Incombustible material
불연기능 (metal board)
Water Proofing
차수기능
PATENT.특허 10-1188812
PATENT.특허 10-1334320
PATENT.특허출원10-2017-0177800

HP Seal

STEP_01 Brick board HP

STEP_02 Out corner

T-Brick 티브릭

ISO 13006 PASS
ISO 10546 PASS
Water Absorption
흡수율 6%이하
Breaking Strength
격임강도 1809N
Modulus Rupture
파열계수 33N/mm²
Not Lead & Cadmium Release
유해물질불검출

STEP_03 T-Brick